

2015

Quantitative Analysis of Desirability in User Experience

Sisira Adikari

School of Information Systems and Accounting, University of Canberra, Canberra, Australia ACT 2617,
Sisira.Adikari@canberra.edu.au

Craig McDonald

School of Information Systems and Accounting, University of Canberra, Canberra, Australia ACT 2617,
craig.mcdonal@canberra.edu.au

John Campbell

School of Information Systems and Accounting, University of Canberra, Canberra, Australia ACT 2617,
john.campbell@anu.edu.au

Follow this and additional works at: <https://aisel.aisnet.org/acis2015>

Recommended Citation

Adikari, Sisira; McDonald, Craig; and Campbell, John, "Quantitative Analysis of Desirability in User Experience" (2015). *ACIS 2015 Proceedings*. 163.
<https://aisel.aisnet.org/acis2015/163>

This material is brought to you by the Australasian (ACIS) at AIS Electronic Library (AISeL). It has been accepted for inclusion in ACIS 2015 Proceedings by an authorized administrator of AIS Electronic Library (AISeL). For more information, please contact elibrary@aisnet.org.

Quantitative Analysis of Desirability in User Experience

Sisira Adikari

School of Information Systems and Accounting
University of Canberra
Canberra, Australia ACT 2617
Email: sisira.adikari@canberra.edu.au

Craig McDonald

School of Information Systems and Accounting
University of Canberra
Canberra, Australia ACT 2617
Email: craig.mcdonal@canberra.edu.au

John Campbell

School of Information Systems and Accounting
University of Canberra
Canberra, Australia ACT 2617
Email: john.campbell@canberra.edu.au

Abstract

The multi-dimensional nature of user experience warrants a rigorous assessment of the interactive experience in systems. User experience assessments are based on product evaluations and subsequent analysis of the collected data using quantitative and qualitative techniques. The quality of user experience assessments is dependent on the effectiveness of the techniques deployed. This paper presents the results of a quantitative analysis of desirability aspects of the user experience in a comparative product evaluation study. The data collection was conducted using 118 item Microsoft Product Reaction Cards (PRC) tool followed by data analysis based on the Surface Measure of Overall Performance (SMOP) approach. The results of this study suggest that the incorporation of SMOP as an approach for PRC data analysis derive conclusive evidence of desirability in user experience. The significance of the paper is that it presents a novel analysis method incorporating product reaction cards and surface measure of overall performance approach for an effective quantitative analysis which can be used in academic research and industrial practice.

Keywords User Experience, Product Reaction Cards, Surface Measure of Overall Performance

1 Introduction

There are many definitions of user experience from the literature. Hassenzahl and Tractinsky (2006) consider user experience as ranging from traditional usability to beauty, hedonic, affective or experiential aspects of technology use. According to Kuniavsky (2010, p.10), user experience is the totality of user perceptions associated with their interactions with an artefact (product, system, or service) in terms of effectiveness (how good is the result?), efficiency (how fast it?), emotional satisfaction (how good does it feel?), and the quality of the relationship with the entity that created the artefact. The ISO standard 9241-210 (2009) defines user experience as perceptions of persons and responses that result from the use or anticipated use of a product, system or service emphasising two main aspects: use and anticipated use. The ISO standard also points out that user experience includes all the users' emotions, beliefs, preferences, perceptions, physical and psychological responses, behaviours and accomplishments that occur before, during and after use, and usability criteria can be used to assess aspects of user experience (ISO, 2009). These two definitions by Kuniavsky (2010) and ISO standard 9241-210 show the complex and multifaceted view of user experience. According to these definitions, user experience assessment needs to be an evaluation of the total users' interactive experience of a product, system or service. As highlighted by Adikari et al. (2011), the interactive experience is the combined result of use (i.e. actual interaction experience), anticipated use (i.e. pre-interaction experience such as needs and expectations), and after use (post-interaction experience), and these three components are equally important for consideration in user experience assessments.

Based on the analysis of the ISO standard 9241-210, Bevan (2009) considers that if user experience includes all behaviour, it presumably includes users' effectiveness and efficiency and it seems consistent with the methods nominated by many people in industry who appear to have subsumed

usability within user experience. As defined in ISO standard 9241-11, usability is concerned with the effectiveness, efficiency and satisfaction with which specified users achieve specified goals in particular environments. Bevan's view indicates that user experience is not distinct, and it is an extension of usability. Preece et al. have explained this broader view of usability within user experience (2002, p. 19) in terms of user experience goals and usability goals emphasising that user experience is at a level beyond that of usability. According to them, user experience occurs as a result of achieving usability goals during an interaction (see Figure 1). Moreover, they point out that user experience goals are more concerned with how users experience an interactive system from their perspective rather than assessing how useful or productive a system is from the product's own perspective. Their definition of user experience goals is: satisfying, enjoyable, fun, entertaining, helpful, motivating, aesthetically pleasing, supportive of creativity, rewarding and emotionally fulfilling.



Figure 1: Usability and UX goals (Preece et al., 2002, p. 19)

As shown in Figure 1, their model of usability and user experience consists of six usability goals: efficient to use, effective to use, safe to use, having good utility, easy to learn, and easy to remember. Importantly, the model does not consider 'satisfaction' as a usability goal at the operational level; instead, it shows as a user experience goal. Another important difference in this model is that of 'safety' which has been included as a primary usability goal. Later, the same authors (Rogers et al. 2011, pp. 23-25) presented an updated model of user experience goals in two dimensions; desirable (positive) ones, and undesirable (negative) ones. The desirable user experience goals are: satisfying, enjoyable, engaging, pleasurable, exciting, entertaining, helpful, motivating, challenging, enhancing sociability, supporting creativity, cognitively stimulating, fun, provocative, surprising, rewarding, and emotionally fulfilling. The undesirable user experience goals are: boring, frustrating, making one feel guilty, annoying, childish, unpleasant, patronizing, making one feel stupidity, cutesy and gimmicky. Rogers et al. (2011, pp. 19-21) also pointed out that interaction design should not only set usability goals for product design but also set user experience goals to assess whether the product is enjoyable, satisfying and motivating. They described many of these goals as subjective qualities concerned with how a system feels to a user. They also highlight that not all usability and user experience goals will be relevant to the design and evaluation of an interactive product (or system) as some combinations will not be compatible.

Accordingly, effective user experience assessments should include evaluation criteria that consider usability goals as well as user experience goals, which are mostly subjective qualities that are experienced by the user during an interaction. Some of the user experience evaluation criteria indicate interrelation among other criteria. For example, 'enjoyable (joy)' is most likely to be dependent on 'fun', and vice versa. These factors highlight the emotional impact on the user during an interaction and point out the desirability of an artefact from the user's point of view. There are many user

experience evaluation methods used in academic and industrial contexts under the categories of lab studies, field studies, surveys, and expert evaluations (Roto et al., 2009). These methods explore different attributes of user experience including some elements of desirability. Desirability in user experience and its' importance have been acknowledged (Hartson and Pyla, 2012, p.32). Recent studies have reported that Product Reaction Cards (PRC) are more effective at expanding the understanding of user experience and desirability (Barnum and Palmer, 2010A, 2010B).

This paper presents the results of a quantitative analysis of user experience of a comparative product evaluation study. Two software products were developed by two distinct agile software development teams based on the same suite of user stories (requirements) presented by a product owner. One product development team followed an integrated agile and user experience design approach and developed the product designated as EAP product, while the other team developed the product designated as CAP product based on traditional agile software development approach. The integrated approach intended to provide only required details of user experience related information as needed to support the analysis and design during agile software development iterations.

2 Product Reaction Cards for Data Collection

Product reaction cards (Benedek & Miner, 2002) aim to elicit the aspects of perceived desirability from a user on the experience of a product. The desirability of user experience is the least tangible aspect of a good user experience, and is concerned with aspects such as imagined pleasure, look and feel of the product and happiness in using the product in context (Goodman et al. 2012, p. 23). Product Reaction Cards (PRC) based assessment has been recognised as one of the preferred methods for assessing the perceived desirability of visual designs (Albert & Tullis, 2013, p. 144; Barnum & Palmer, 2010B). PRC consists of a pack of 118 cards with 60% positive and 40% negative or neutral adjectives, from which participants choose the words that reflected their feelings toward their interactive experience with a product. According to Barnum and Palmer (2010B, p. 257), PRC unlocks information regarding the user's sense of the quality of information in a more revealing way than any other tool or techniques they had tried. Moreover, they highlighted specific strengths and values of using PRC complex information systems: as users they are able to express their feeling about their interactive experience to show what they like and dislike.

Accordingly, PRC is an instrument that can be used to get useful insights and perceptions of a product effectively, and PRC-based assessments encourage users to provide a balanced view of both positive and negative feedback. User feedback can be analysed to determine the extent to which the tested product meets user requirements and expectations, and to identify design issues and deficiencies affecting the product.

3 Analysis of Product Reaction Cards Assessment

In this research study, the product reaction cards evaluation aimed to gauge the overall acceptability of the product tested by the user participant. Determining the optimal sample size for a user experience research study is important. Based on a large number of studies, Faulkner (2003) summarised that a sample size of 15 users will be able discover minimum of 90% of usability issues and mean of 97.050% usability issues. For user testing experiments, Alroobaea and Mayhew (2014) reported that the optimum sample size of 16 ± 4 users provide much validity. A total number of 32 test users participated in this study. Test users were grouped into two independent categories of 16 users. These two groups of test users were used for both individual product evaluations. Upon the completion of individual product evaluation on CAP and EAP product, users were asked to refer to the product reaction cards checklist and choose all words that best described their interactive experience with the product. Users were then asked to refine their selection and narrow down it to the top five product reaction cards words and rank them in the order of importance (5 being the most important and 1 being the least important). There were 16 product reaction cards evaluations for each of the two products totalling 32 for both products CAP and EAP.

Table 1 and Table 2 show the participant choices in five categories that have been ranked from one to five for both products CAP and EAP. These PRC word choices can be considered as ordered categorical data.

CAP Product					
Participant ID	Ranking5	Ranking4	Ranking3	Ranking2	Ranking1
u1	Ambiguous	Poor Quality	Faulty	Rigid	
u2	Poor Quality	Unattractive	Inadequate		
u3	Ambiguous	Poor Quality	Unattractive	Misleading	Confusing
u4	Ambiguous	Annoying	Frustrating	Poor Quality	Unrefined
u5	Ambiguous	Confusing	Inadequate	Controllable	Simple
u6	Confusing	Unattractive	Ordinary		
u7	Insecure	Ordinary	Dull	Business-like	Creative
u8	Vague	Confusing	Annoying	Distracting	Inadequate
u9	Confusing	Approachable	Simple	Controllable	Easy to use
u10	Simple	Flexible	Fast	Easy to use	Useful
u11	Effective	Easy to use	Time saving	Simple	Clear
u12	Frustrating	Distracting	Cluttered	Ambiguous	Usable
u13	Useful	Usable	Time saving	Satisfying	Organised
u14	Usable	New	Meaningful	clear	Creative
u15	Annoying	Awkward	Boring	Cluttered	Complex
u16	Hard to use	Confusing	Ambiguous	Annoying	Awkward

Table 1. Ranked PRC words for CAP product

EAP Product					
Participant ID	Ranking5	Ranking4	Ranking3	Ranking2	Ranking1
u1	Usable	Accessible	Approachable	Ordinary	Inconsistent
u2	Unattractive	Inadequate	Ineffective	Unrefined	Vague
u3	Ambiguous	Confusing	Frustrating	Inadequate	Incomprehensible
u4	Accessible	Easy to use	Efficient	Stable	Responsive
u5	Usable	Clear	Easy to use	Efficient	Satisfying
u6	Useful	Usable	Understandable	Satisfying	Meaningful
u7	Useful	Meaningful	Easy to use	Simple	Organised
u8	Useful	Usable	Straightforward	Simple	Ordinary
u9	Useful	Easy to use	Responsive	Business like	Consistent
u10	Usable	Straightforward	Approachable	Accessible	Relevant
u11	Accessible	Effortless	Ordinary	Business-like	Clear
u12	Useful	Understandable	Clear	Approachable	Accessible
u13	Useful	Effective	Easy to use	Approachable	Simple
u14	Usable	Easy to use	Friendly	Satisfying	Simplistic
u15	Effective	Efficient	Useful	Usable	Clean
u16	Easy to use	Useful	Usable	Clear	Appealing

Table 2. Ranked PRC words for EAP product

Each of the PRC word choices was assigned with numbers ranging from one to five (from 'Ranking1 = 1' to 'Ranking5 = 5'). Then the total scores for each PRC word were calculated by adding each assigned value for each PRC word occurrence in all five categories.

Table 3 shows the total score for each attribute for both CAP and EAP product.

CAP Product	
PRC Attribute	Total Score
Ambiguous	25
Confusing	23
Poor Quality	15
Annoying	14
Simple	11
Unattractive	11
Usable	10
Frustrating	8
Easy to use	7
Inadequate	7
Ordinary	7
Distracting	6
Time saving	6
Useful	6
Awkward	5
Cluttered	5
Effective	5
Hard to use	5
Insecure	5
Vague	5
Approachable	4
Controllable	4
Flexible	4
New	4
Boring	3
clear	3
Dull	3
Fast	3
Faulty	3
Meaningful	3
Business-like	2
Creative	2
Misleading	2
Rigid	2
Satisfying	2
Complex	1
Organised	1

EAP Product	
PRC Attribute	Total Score
Useful	37
Usable	33
Easy to use	26
Accessible	17
Approachable	10
Clear	10
Effective	9
Efficient	9
Straightforward	7
Understandable	7
Inadequate	6
Ordinary	6
Ambiguous	5
Meaningful	5
Satisfying	5
Simple	5
Unattractive	5
Business like	4
Confusing	4
Effortless	4
Responsive	4
Friendly	3
Frustrating	3
Ineffective	3
Stable	2
Unrefined	2
Appealing	1
Clean	1
Consistent	1
Incomprehensible	1
Inconsistent	1
Organised	1
Relevant	1
Simplistic	1
Vague	1

Table 3. Total score of each PRC attributes for CAP and EAP product

In order to make a comparison of both products in terms of PRC attributes, attributes that are common in both products were selected. These common attributes and their corresponding total scores for both products (product 1 and product 2) are shown in Table 4. PRC attributes that are not common to both products were ignored.

PRC Attributes	CAP Product	EAP Product
	Total Score	Total Score
Ambiguous	25	5
Confusing	23	4
Frustrating	8	3
Inadequate	7	6
Ordinary	7	6
Simple	11	5
Unattractive	11	5
Unrefined	1	2
Vague	5	1
Approachable	4	10
Business-like	2	4
Clear	3	10
Easy to use	7	26
Effective	5	9
Meaningful	3	5
Organised	1	1
Satisfying	2	5
Usable	10	33
Useful	6	37

Table 4. Total score of PRC attributes that are common for both CAP and EAP products

Common attributes in Table 4 consist of both positive and negative items. In order to make the product comparison in terms of positive as well as negative PRC attributes, a further separation was made to distinguish the positive and negative PRC attributes from the common attributes in Table 4. Table 5 shows total scores for common positive and negative PRC attributes of product 1 and product 2 separately.

Positive PRC Attributes	CAP Product	EAP Product
	Total Score	Total Score
Approachable	4	10
Business-like	2	4
Clear	3	10
Easy to use	7	26
Effective	5	9
Meaningful	3	5
Organised	1	1
Satisfying	2	5
Usable	10	33
Useful	6	37

Negative PRC Attributes	CAP Product	EAP Product
	Total Score	Total Score
Ambiguous	25	5
Confusing	23	4
Frustrating	8	3
Inadequate	7	6
Ordinary	7	6
Simple	11	5
Unattractive	11	5
Unrefined	1	2
Vague	5	1

Table 5. Common positive and negative PRC attributes for both products

4 Surface Measure of Overall Performance

The radar chart approach based Surface Measure of Overall Performance (SMOP) has been recognised as a technique that obtains the overall performance of a system (Mosley & Mayer, 1998; Schmid et al., 1999; Schütz et al., 1998; Behringer et al., 2005). SMOP is given by the surface area of a radar chart formed by the joined lines of performance indicators represented in each dimension (radial line) of the chart.

Schütz et al. (1998, p. 39) have highlighted the main goals of using a radar-based SMOP approach:

- Visualization of interrelated performance measures through standardized scales.
- Presentation of an effective and revealing description of selective performance dimensions in just one synthetic indicator (using the surface of the radar chart to the illustration of the performance of the system).

- The change in the overall performance between two points of intervals can be analysed.
- The shape of the radar chart, as well as the overall performance measures, can be used for comparisons of systems.

The mathematical formula for calculating SMOP for four axes:

$$SMOP = (P1*P2)+(P2*P3)+(P3*P4)+(P4*P5)+(P5*P6)+....+(Pn*P1) * \sin 90/2$$

The mathematical formula for calculating SMOP for more or less than four axes:

$$SMOP = (P1*P2)+(P2*P3)+(P3*P4)+(P4*P5)+(P5*P6)+....+(Pn*P1) * \sin(360/n)/2$$

Where P = data point on the performance indicator and n = total number of data points.

In SMOP, the maximum value that can be assigned to any radial line is '1'. With reference to Table 5 for positive PRC attributes, 'useful' can be found as the attribute having the highest total score with the value '37'. For SMOP calculations, this highest value 37 is weighted as the calculated highest score '1' and all other total scores are converted as a fraction of '37' to get 'calculated Scores'. Following a similar approach, 'ambiguous' was shown with the highest score among PRC negative attributes with the value 25, and all total scores were expressed as a fraction of 25 to derive 'calculated scores'. For both product 1 and product 2, the calculated scores of an attribute for SMOP calculations are shown in Table 6.

Positive PRC Attributes	CAP Product	EAP Product
	Calculated Score	Calculated Score
Approachable	0.1	0.27
Business-like	0.05	0.1
Clear	0.08	0.27
Easy to use	0.18	0.7
Effective	0.13	0.24
Meaningful	0.08	0.13
Organised	0.02	0.02
Satisfying	0.05	0.13
Usable	0.27	0.89
Useful	0.16	1

Negative PRC Attributes	CAP Product	EAP Product
	Calculated Score	Calculated Score
Ambiguous	1	0.2
Confusing	0.92	0.16
Frustrating	0.32	0.12
Inadequate	0.28	0.24
Ordinary	0.28	0.24
Simple	0.44	0.2
Unattractive	0.44	0.2
Unrefined	0.04	0.08
Vague	0.2	0.04

Table 6. Calculated CAP and EAP attribute values for SMOP Radar Charts

As shown in Figure 2 and 3, two radar charts were developed from the data of Table 6, representing the performance measure of the corresponding PRC attributes on each radial axis. Figure 1 shows the radar chart for positive PRC attributes.

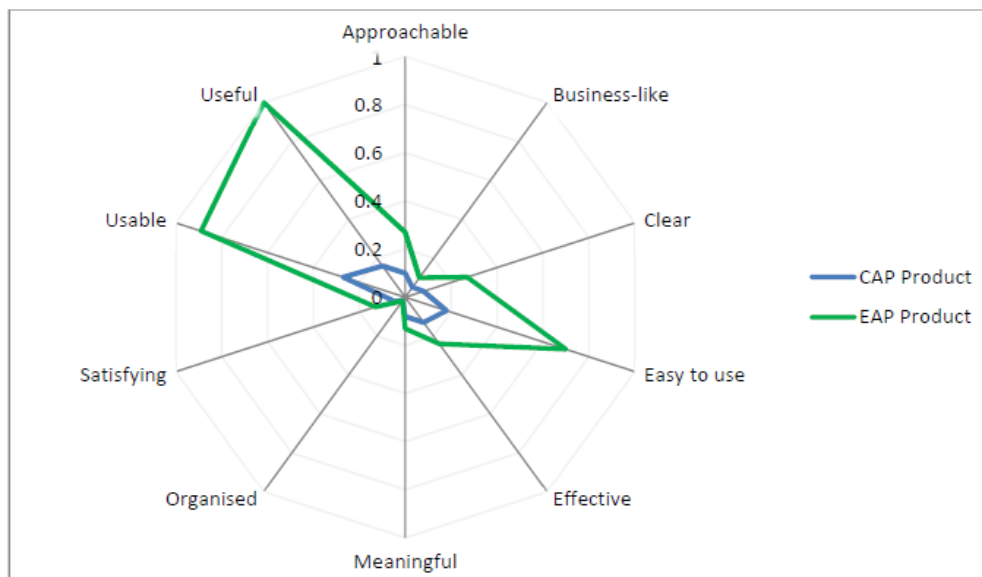


Figure 2: Radar chart for positive PRC attributes

The positive PRC attributes represented in Figure 1 are: approachable, business-like, clear, easy to use, effective, meaningful, organise, satisfying, usable and useful. The two overlaying radar charts in Figure 1 depicts the relative system performance of the CAP product and the EAP product in terms of positive PRC attributes. The highest performing three positive PRC attributes are:

- Useful (performance score = 1)
- Usable (performance score = 0.89)
- Easy to use (performance score = 0.7).

Figure 2 illustrates the comparative positive performance between CAP and EAP products. As evident in Figure 2, the EAP product demonstrates a higher level of performance, representing a larger surface area, and the CAP product has a much lower performance than the EAP product, with a significantly smaller surface area of the radar chart.

Figure 3 shows the radar chart for negative PRC attributes.

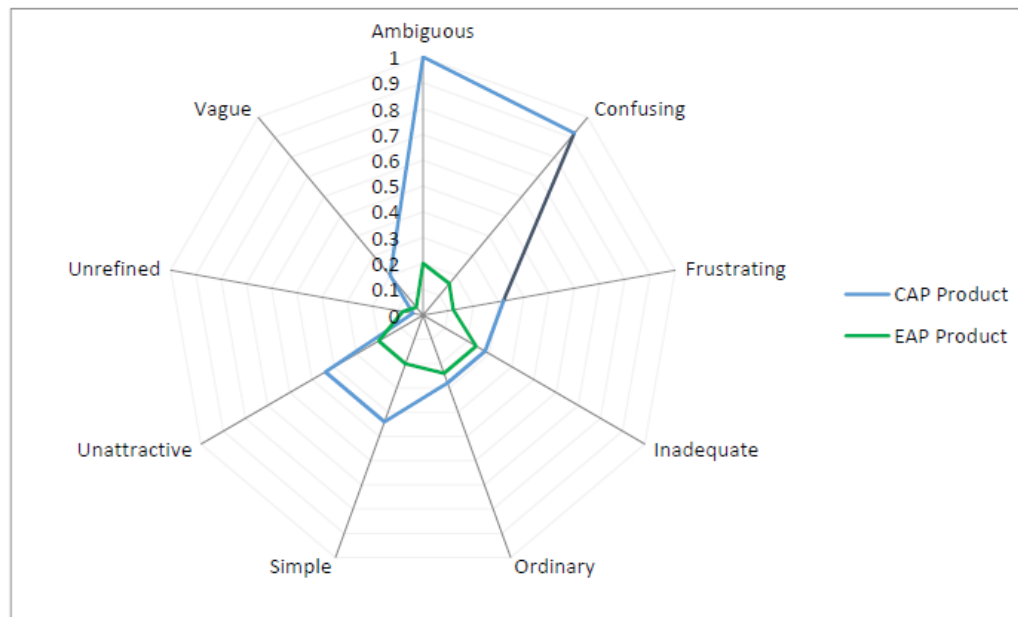


Figure 3: Radar chart for negative PRC attributes

The negative PRC attributes represented in Figure 3 are Ambiguous, Confusing, Frustrating, Inadequate, Ordinary, Simple, Unattractive, Unrefined, and Vague. The two overlaying radar charts in Figure 3 depicts the relative system performance of the CAP and EAP products in terms of negative PRC attributes. The highest performing three negative PRC attributes are:

- Ambiguous (performance score = 1)
- Confusing (performance score = 0.92)
- Simple and Unattractive (performance score = 0.44).

Unlike Figure 2, Figure 3 illustrates the comparative negative performance between CAP and EAP products. Hence, the radar chart with the larger surface area corresponds to the product with poor performance, and the radar chart with smaller surface area corresponds to the product with 'less poor performance'. As evident in Figure 3, the CAP product demonstrates a higher level of poor performance representing a larger surface area, and the EAP product performs much better than the CAP product with a significantly smaller surface area of the radar chart.

4.1 SMOP calculations – positive PRC attributes in CAP product

SMOP for positive PRC attributes in CAP product is calculated applying the formula:

$$\begin{aligned} \text{SMOP (CAP)} &= (P1*P2)+(P2*P3)+(P3*P4)+(P4*P5)+(P5*P6)+\dots+(Pn*P1) * \sin(360/n)/2 \\ &= (0.1*0.05)+(0.05*0.08)+(0.08*0.18)+(0.18*0.13)+(0.13*0.08)+(0.08*0.02)+(0.02*0.05)+(0.05*0.27)+(0.27*0.16)+(0.16*0.01)*\sin(360/10)*0.5 = \mathbf{0.038} \end{aligned}$$

4.2 SMOP calculations – positive PRC attributes in EAP product

SMOP for positive PRC attributes in EAP product is calculated applying the formula:

$$\begin{aligned} \text{SMOP (EAP)} &= (P1*P2)+(P2*P3)+(P3*P4)+(P4*P5)+(P5*P6)+\dots+(Pn*P1) * \sin(360/n)/2 \\ &= (0.27*0.1)+(0.1*0.27)+(0.27*0.7)+(0.7*0.24)+(0.24*0.13)+(0.13*0.02)+(0.02*0.13)+(0.13*0.89)+(0.89*1.0)+(1.0*0.27)*\sin(360/10)*0.5 = \mathbf{0.504} \end{aligned}$$

4.3 SMOP calculations – negative PRC attributes in CAP product

SMOP for negative PRC attributes in CAP product is calculated applying the formula:

$$\begin{aligned} \text{SMOP (CAP)} &= (P1*P2)+(P2*P3)+(P3*P4)+(P4*P5)+(P5*P6)+\dots+(Pn*P1) * \sin(360/n)/2 \\ &= (1.0*0.92)+(0.92*0.32)+(0.32*0.28)+(0.28*0.28)+(0.28*0.44)+(0.44*0.44)+(0.44*0.04)+(0.04*0.02)+(0.02*1.0)*\sin(360/9)*0.5 = \mathbf{0.617} \end{aligned}$$

4.4 SMOP calculations – negative PRC attributes in EAP product

SMOP for negative PRC attributes in EAP product is calculated applying the formula:

$$\begin{aligned} \text{SMOP (EAP)} &= (P1*P2)+(P2*P3)+(P3*P4)+(P4*P5)+(P5*P6)+\dots+(Pn*P1) * \sin(360/n)/2 \\ &= (0.02*0.16)+(0.16*0.12)+(0.12*0.24)+(0.24*0.24)+(0.24*0.20)+(0.20*0.20)+(0.20*0.08)+(0.08*0.04)+(0.04*0.02)*\sin(360/9)*0.5 = \mathbf{0.081} \end{aligned}$$

4.5 Summary of SMOP calculations

Table 7 shows the summary of results of SMOP calculations.

PRC Positive Attributes - Summary of Results		
Product	SWOP Value	Remarks
CAP	0.038	In terms of PRC positive attributes, EAP product shows a significantly more effective performance with a much higher SWOP score of 0.504.
EAP	0.504	

PRC Negative Attributes - Summary of Results		
Product	SWOP Value	Remarks
CAP	0.617	In terms of PRC negative attributes, CAP product shows a significantly poorer performance with a much higher SWOP score of 0.617.
EAP	0.081	

Table 7. Summary of results of SMOP calculations

Results of the PRC analysis represented by the two radar charts (see Figure 4 and 5 which shows both radar charts in Figure 2 and 3 for comparison) show that the EAP product is significantly more 'effective' than the CAP product.

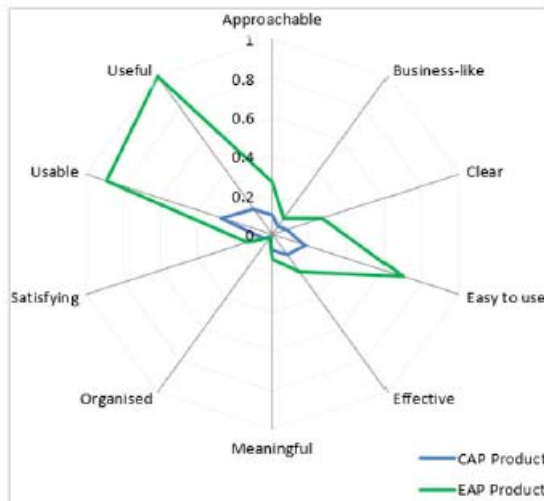


Figure 4: Analysis: PRC positive attributes

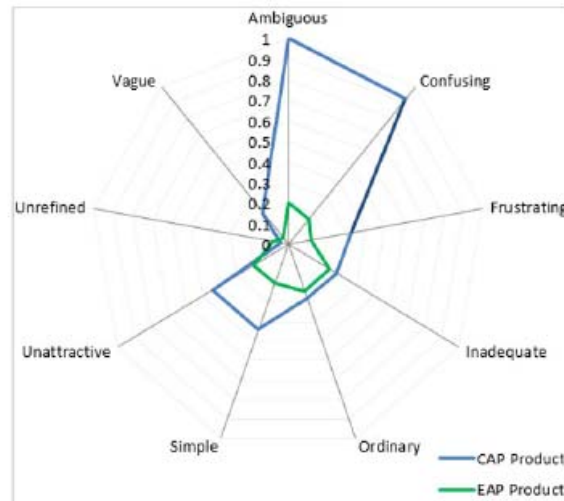


Figure 5: Analysis: PRC negative attributes

The overall conclusion that can be drawn from the results of product reaction cards evaluation is that the EAP product has greater positive PRC attributes and fewer negative PRC attributes.

5 Conclusions

This paper presents a quantitative data analysis of a comparative desirability assessment of two software products developed based on two conceptually different design approaches. The data collection was conducted using 118 item Microsoft Product Reaction Cards (PRC) tool, followed by data analysis based on the Surface Measure of Overall Performance (SMOP) approach. The main contribution of this research comes from the integrated method that incorporated product reaction cards and surface measure of performance for data collection and data analysis. The product reaction cards evaluation introduced two novel techniques for data analysis: a novel weighting system to scale the data for analysis, and the incorporation of the Surface Measure of Overall Performance as a technique of data analysis to derive conclusive results. The results of this study suggest that the incorporation of SMOP as an approach for PRC data analysis is effective in deriving conclusive evidence of desirability in user experience.

6 References

- Adikari, S., McDonald, C., & Campbell, J. 2011. "A design science framework for designing and assessing user experience". *Human-computer interaction. Design and Development Approaches*, Berlin, Heidelberg, Springer: pp. 25-34.
- Alroobaea, R., Mayhew, P. J. 2014. "How many participants are really enough for usability studies?". *Proceedings of Science and Information Conference (SAI)*, IEEE: pp 48-56.
- Albert, W., Tullis, T. 2013. *Measuring the User Experience: Collecting, Analyzing, and Presenting Usability Metrics*. Elsevier.
- Barnum, C. M., Palmer, L. A. 2010A. "More than a feeling: understanding the desirability factor in user experience". *CHI'10 Extended Abstracts on Human Factors in Computing Systems*. ACM: pp. 4703-4716).
- Barnum, C. M., Palmer, L. A. 2010B. "Tapping into Desirability in User Experience". *Usability of Complex Information Systems: Evaluation of User Interaction*, pp 253-279.
- Behringer, F., Kapplinger, B., Moraal, D., Schonfeld, G. 2005. "Striking Differences in Continuing Training in Enterprises across Europe: Comprehensive Overview of Key Results of CVTS". http://www.bibb.de/dokumente/pdf/Country_specific_thematic_analysis_of..%28CVTSII%29.pdf. Retrieved 01 August, 2015.

- Benedek, J., Miner, T. 2002. "Measuring Desirability: New Methods for Evaluating Desirability in a Usability Lab Setting". Proceedings of Usability Professionals Association, pp 8-12.
- Bevan, N. 2009. "What is the difference between the purpose of usability and user experience evaluation methods?". Proceedings of the UXEM'09 Workshop, INTERACT 2009.
- Goodman, E., Kuniavsky, M., Moed, A. 2012. *Observing the User Experience: A Practitioner's Guide to User Research*. Morgan Kaufmann.
- Faulkner, L. 2003. "Beyond the five-user assumption: Benefits of increased sample sizes in usability testing", Behavior Research Methods, Instruments and Computers, (35:3), pp 379-383.
- Hartson, R., Pyla, P. S. 2012. *The UX Book: Process and guidelines for ensuring a quality user experience*. Elsevier.
- Hassenzahl, M., Tractinsky, N. 2006. "User Experience - A Research Agenda". *Behaviour & Information Technology*, (25:2), pp 91-97.
- ISO. 2009. *ISO FDIS 9241-210: Human-centred design process for interactive systems*. International Organization for Standardization.
- Kuniavsky, M. 2010. *Smart Things: Ubiquitous Computing User Experience Design*. Morgan Kaufmann.
- Mosley, H., Mayer, A. 1998. "Benchmarking National Labour Market Performance: A Radar Chart Approach: WZB Discussion Paper, No. FS I 99-202".
<http://www.econstor.eu/bitstream/10419/43952/1/301154597.pdf>. Retrieved 01 August, 2015.
- Preece, J., Rogers, Y., Sharp, H. 2002. *Interaction design: beyond human-computer interaction*. John Wiley & Sons.
- Rogers, Y., Sharp, H., Preece, J. 2011. *Interaction Design: Beyond Human-Computer Interaction*. John Wiley & Sons.
- Roto, V., Obrist, M., Vaananen-Vainio-Mattila, K. 2009. "User experience evaluation methods in academic and industrial contexts". CHI Extended Abstracts. pp 2763-2766.
- Schmid, G., Schütz, H., Speckesser, S. 1999. "Broadening the scope of benchmarking: radar charts and employment systems", *Labour*, (13:4), pp 879-899.
- Schütz, H., Speckesser, S., Schmid, G. 1998. "Benchmarking Labour Market Performance and Labour Market Policies: Theoretical Foundations and Applications: WZB Discussion Paper, No. FS I 98-205". <http://www.econstor.eu/bitstream/10419/43918/1/252814037.pdf>. Retrieved 01 August, 2015.

Copyright

Copyright: © 2015 Sisira Adikari, Craig McDonald and John Campbell. This is an open-access article distributed under the terms of the [Creative Commons Attribution-NonCommercial 3.0 Australia License](https://creativecommons.org/licenses/by-nc/3.0/au/), which permits non-commercial use, distribution, and reproduction in any medium, provided the original author and ACIS are credited.